



Sixpack:

It can be directly connected by the flat cables, ensure the following color guide for correct connection:

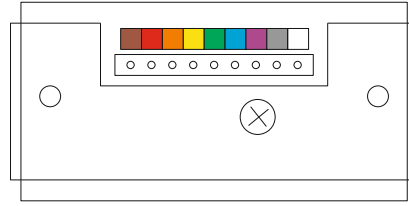


Depending by the version, the sixpack module can be internally connected in Common Anode or Common Cathode configuration. Set the SIDE737 module "KC/AC" jumper according to the sixpack module version.

Both sixpack modules (Captain and F/O) must be of the same type KC/AC.

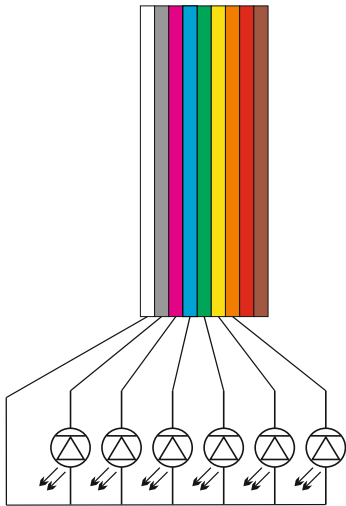

Ex1:Common Anode

set the jumper in AC position for common anode led configuration

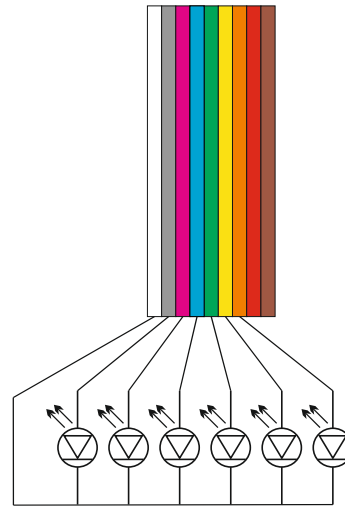

Ex2:CommonCathode

on the SIDE737 board (if any) set the jumper in KC position for common cathode led configuration

CONNECTIONS

See the following picture for connections:

